



ТС ПЛАСТИНЫ ДЕРЖАВКИ

STGC

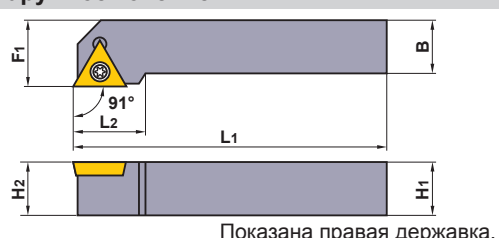



Наружное точение

SP Тип



Показана правая державка.

Финишная FP	Финишная FM	Чистовая LP	Чистовая LM
 (11,16)	 (11,16)	 (11,16)	 (11,16)
Получистовая MP	Получистовая MM	Плоский верх	CBN/PCD
 (11,16)	 (11,16)	 (11,16)	 (11,13)

Обозначение	Наличие		Обозначение пластины	Размеры (мм)										
	R	L		H1	B	L1	L2	H2	F1					
STGCR/L1010E11	●	●	TCGT TCMW TCMT	1102	10	10	70	13.5	10	12	—	—	TS25	ТКУ08F
1212F13	●	●		1303	12	12	80	17.6	12	16	—	—	TS3	ТКУ08F
1616H16	●	●		16T3	16	16	100	20.7	16	20	—	—	TS43	ТКУ15F
2020K16	●	●		16T3	20	20	125	22.9	20	25	SPSTN32	JSS6	TS406	ТКУ15R

* Момент затяжки (N • м) : TS25=1.0, TS3=1.0, TS43=3.5

НАРУЖНОЕ ТОЧЕНИЕ