


ROTATING TOOLS

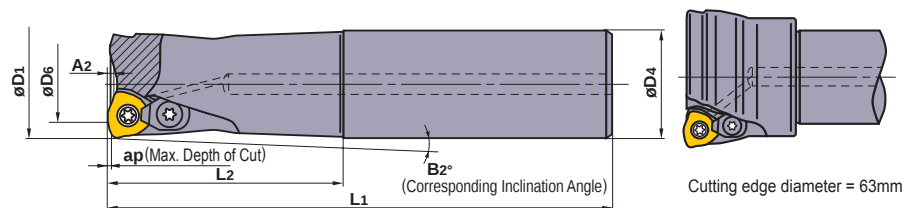

STRAIGHT SHANK TYPE

Right hand tool holder only.

Type	Order Number	Stock	Number of Teeth	Dimensions (mm)							Clamp Screw	Clamp Bridge	Clamp Bridge Screw	Spring	Wrench	Insert
				D1	D4	D6	L1	L2	ap	A2	B2°					
Short	AJX06R162SA16ES	●	2	16	16	8.9	70	20	1	0.3	3°30'	TS25	—	—	—	①TKY08F JOM 06T215 ZZSR-∞
	172SA16ES	●	2	17	16	9.9	70	20	1	0.3	—	TS25	—	—	—	①TKY08F
Standard	AJX06R162SA16S	●	2	16	16	8.9	110	30	1	0.3	2°15'	TS25	—	—	—	①TKY08F
	172SA16S	●	2	17	16	9.9	110	20	1	0.3	—	TS25	—	—	—	①TKY08F JOM 06T215 ZZSR-∞
	203SA20S	●	3	20	20	12.9	130	50	1	0.3	1°18'	TS25	—	—	—	①TKY08F
	223SA20S	●	3	22	20	14.9	130	30	1	0.3	—	TS25	—	—	—	①TKY08F
	AJX08R202SA20S	●	2	20	20	11.4	130	50	1.5	0.5	1°20'	TS33	—	—	—	②TKY08D
	222SA20S	●	2	22	20	13.4	130	30	1.5	0.5	—	TS33	—	—	—	②TKY08D JOM 080320 ZZSR-∞
	253SA25S	●	3	25	25	16.4	140	60	1.5	0.5	1°06'	TS33	—	—	—	②TKY08D
	283SA25S	●	3	28	25	19.4	140	40	1.5	0.5	—	TS33	—	—	—	②TKY08D
	AJX09R252SA25S	●	2	25	25	14.9	140	60	2	1	1°06'	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	282SA25S	●	2	28	25	17.9	140	40	2	1	—	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	303SA32S	●	3	30	32	20.0	150	70	2	1	1°48'	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	323SA32S	●	3	32	32	21.9	150	70	2	1	0°56'	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	353SA32S	●	3	35	32	24.9	150	50	2	1	—	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	404SA32S	●	4	40	32	29.9	150	50	2	1	—	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	404SA40S	●	4	40	40	29.9	150	70	2	1	1°48'	TS351	AMS3	AJS3010T10	ASS2	②TKY10D
	AJX12R302SA32S	●	2	30	32	18.3	150	70	2	1.5	1°48'	TS407	AMS4	AJS4012T15	ASS2	②TKY15D
	322SA32S	●	2	32	32	20.3	150	70	2	1.5	0°58'	TS43	AMS4	AJS4012T15	ASS2	②TKY15D
	352SA32S	●	2	35	32	23.3	150	50	2	1.5	—	TS43	AMS4	AJS4012T15	ASS2	②TKY15D
	403SA32S	●	3	40	32	28.3	150	50	2	1.5	—	TS43	AMS4	AJS4012T15	ASS2	②TKY15D
	403SA40S	●	3	40	40	28.3	150	70	2	1.5	0°57'	TS43	AMS4	AJS4012T15	ASS2	②TKY15D
	403SA42S	★	3	40	42	28.3	150	70	2	1.5	1°48'	TS43	AMS4	AJS4012T15	ASS2	②TKY15D
	AJX14R503SA40S	●	3	50	40	38.2	150	50	2	2	—	TS54	AMS5	AJS5014T25	ASS3	②TKY25D
	503SA42S	★	3	50	42	38.2	150	50	2	2	—	TS54	AMS5	AJS5014T25	ASS3	②TKY25D
	634SA40S	□	4	63	40	51.1	150	50	2	2	—	TS54	AMS5	AJS5014T25	ASS3	②TKY25D
	634SA42S	★	4	63	42	51.1	150	50	2	2	—	TS54	AMS5	AJS5014T25	ASS3	②TKY25D

★ Clamp Torque (N • m) : TS25=1.0, TS33=1.0, TS351=2.5, TS407=3.5, TS43=3.5, TS54=7.5, AJS3010T10=2.5, AJS4012T15=3.5, AJS5014T25=7.5

● : Inventory maintained. ★ : Inventory maintained in Japan.

□ : Non stock, produced to order only.