



ROTATING TOOLS




Cutting edge diameter = 63mm

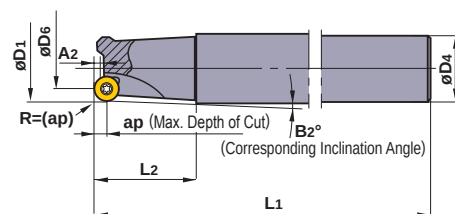

STRAIGHT SHANK TYPE

Right hand tool holder only.

Cutting Edge R(a)	Type	Order Number	Stock	Number of Teeth	Dimensions (mm)						 *			
					D1	D6	L1	D4	L2	A2	B2°	Clamp Screw	Wrench	Insert
4	R	BRP4NR121S12	★	1	12	3.8	85	12	25	0.2	3°00'	CS250560T	②TKY08F	①RPMW08T2M0E/T ②RPMT08T2M0E-JS
		161S16	★	1	16	7.8	85	16	25	1.0	3°00'	CS250560T	②TKY08F	
		202S20	★	2	20	11.8	100	20	30	2.0	2°25'	CS250560T	②TKY08F	
		253S25	★	3	25	16.8	115	25	35	2.0	2°02'	CS250560T	②TKY08F	
	L	121LS12	★	1	12	3.8	150	12	70	0.2	0°57'	CS250560T	②TKY08F	
		161LS16	★	1	16	7.8	150	16	70	1.0	0°57'	CS250560T	②TKY08F	
		202LS20	★	2	20	11.8	180	20	100	2.0	0°39'	CS250560T	②TKY08F	
		253LS25	★	3	25	16.8	180	25	100	2.0	0°39'	CS250560T	②TKY08F	
	EL	202ELS20	★	2	20	11.8	250	20	130	2.0	0°30'	CS250560T	②TKY08F	
		253ELS25	★	3	25	16.8	250	25	130	2.0	0°30'	CS250560T	②TKY08F	
5	R	BRP5NR161S16	★	1	16	5.8	80	16	25	0.3	3°09'	CS350760T	②TKY15F	①RPMW10T3M0E/T ②RPMT10T3M0E-JS
		201S20	★	1	20	9.8	100	20	30	1.2	2°31'	CS350760T	②TKY15F	
		252S25	★	2	25	14.8	115	25	35	2.5	2°06'	CS350860T	②TKY15F	
		323S32	★	3	32	21.8	125	32	45	2.5	1°34'	CS350860T	②TKY15F	
	L	161LS16	★	1	16	5.8	150	16	70	0.3	0°58'	CS350760T	②TKY15F	
		201LS20	★	1	20	9.8	180	20	100	1.2	0°40'	CS350760T	②TKY15F	
		252LS25	★	2	25	14.8	180	25	100	2.5	0°40'	CS350860T	②TKY15F	
		323LS32	★	3	32	21.8	200	32	120	2.5	0°33'	CS350860T	②TKY15F	
	EL	252ELS25	★	2	25	14.8	250	25	130	2.5	0°30'	CS350860T	②TKY15F	
		323ELS32	★	3	32	21.8	300	32	180	2.5	0°22'	CS350860T	②TKY15F	
6	R	BRP6PR322S32	★	2	32	19.8	125	32	45	4	1°37'	TS43	①TKY15D	①RPMW1204M0E/T ②RPMT1204M0E-JS
		403S32	★	3	40	27.9	125	32	45	4	—	TS43	①TKY15D	
		504S32	★	4	50	37.8	150	32	50	4	—	TS43	①TKY15D	
		504S42	★	4	50	37.8	150	42	50	4	—	TS43	①TKY15D	
	L	322LS32	★	2	32	19.8	200	32	120	4	0°33'	TS43	①TKY15D	
		403LS32	★	3	40	27.9	200	32	120	4	—	TS43	①TKY15D	
		504LS32	★	4	50	37.8	250	32	150	4	—	TS43	①TKY15D	
		504LS42	★	4	50	37.8	250	42	150	4	—	TS43	①TKY15D	
	EL	322ELS32	★	2	32	19.8	300	32	50	4	1°26'	TS43	①TKY15D	
		403ELS32	★	3	40	27.9	300	32	120	4	—	TS43	①TKY15D	
403ELS42		★	3	40	27.9	300	42	50	4	2°44'	TS43	①TKY15D		
504ELS42		★	4	50	37.8	300	42	50	4	—	TS43	①TKY15D		
8	R	BRP8PR402S32	★	2	40	23.8	125	32	45	5.5	—	TS54	①TKY25D	①RPMW1606M0E/T ②RPMT1606M0E-JS
		503S32	★	3	50	33.8	150	32	50	5.5	—	TS54	①TKY25D	
		503S42	★	3	50	33.8	150	42	50	5.5	—	TS54	①TKY25D	
		634S32	★	4	63	46.8	150	32	50	5.5	—	TS54	①TKY25D	
		634S42	★	4	63	46.8	150	42	50	5.5	—	TS54	①TKY25D	
	L	402LS32	★	2	40	23.8	200	32	120	5.5	—	TS54	①TKY25D	
		503LS32	★	3	50	33.8	250	32	150	5.5	—	TS54	①TKY25D	
		503LS42	★	3	50	33.8	250	42	150	5.5	—	TS54	①TKY25D	
		634LS32	★	4	63	46.8	250	32	150	5.5	—	TS54	①TKY25D	
	EL	634LS42	★	4	63	46.8	250	42	150	5.5	—	TS54	①TKY25D	
402ELS32		★	2	40	23.8	300	32	50	5.5	—	TS54	①TKY25D		
402ELS42		★	2	40	23.8	300	42	50	5.5	2°52'	TS54	①TKY25D		
503ELS42		★	3	50	33.8	300	42	50	5.5	—	TS54	①TKY25D		
634ELS42		★	4	63	46.8	300	42	50	5.5	—	TS54	①TKY25D		

(Note) R : regular type L : long type EL : extra long type

★ Clamp Torque (N · m) : CS250560T=1.0, CS350760T=3.5, CS350860T=3.5, TS43=3.5, TS54=7.5

● : Inventory maintained. ★ : Inventory maintained in Japan.