


Type	Order Number	Stock R	Coolant Hole ○	Number of Teeth	Dimensions (mm)																	
					R	D1	D4	L1	L2	L3	ap	B2°	B5°	Inner, Outer Clamp	Peripheral Screw	Wrench		Inner		Outer		Peripheral
																			Insert			
Long Neck Cutting Edge	SRM2200SNLF	★	—	4	10	20	20	180	100	—	30	—	—	TS32	TS25	①TKY08D	①TKY08D	SRG20C SRM20C-M	SRG20E SRM20E-M	APMT1135 PDER-02		
	2200SALF	★	○	4	10	20	20	180	100	—	30	—	—	TS32	TS25	①TKY08D	①TKY08D	SRG20C SRM20C-M	SRG20E SRM20E-M	APMT1135 PDER-02		
	2250SNLF	★	—	4	12.5	25	25	200	120	—	37	—	—	TS43	TS25	②TKY15T	③TKY08F	SRG25C SRM25C-M	SRG25E SRM25E-M	APMT1135 PDER-02		
	2250SALF	★	○	4	12.5	25	25	200	120	—	37	—	—	TS43	TS25	②TKY15T	③TKY08F	SRG25C SRM25C-M	SRG25E SRM25E-M	APMT1135 PDER-02		
	2300SNLF	★	—	4	15	30	32	230	150	—	44	—	—	TS55	TS43	②TKY25T	③TKY15F	SRG30C SRM30C-M	SRG30E SRM30E-M	APMT1604 PDER-02		
	2300SALF	★	○	4	15	30	32	230	150	—	44	—	—	TS55	TS43	②TKY25T	③TKY15F	SRG30C SRM30C-M	SRG30E SRM30E-M	APMT1604 PDER-02		
Extra Long Cutting Edge	SRM2200SNLL	★	—	4	10	20	25	250	120	35	30	1°30'	—	TS32	TS25	①TKY08D	①TKY08D	SRG20C SRM20C-M	SRG20E SRM20E-M	APMT1135 PDER-02		
	2200SALL	★	○	4	10	20	25	250	120	35	30	1°30'	—	TS32	TS25	①TKY08D	①TKY08D	SRG20C SRM20C-M	SRG20E SRM20E-M	APMT1135 PDER-02		
	2250SNLL	★	—	4	12.5	25	32	300	170	37	37	1°30'	—	TS43	TS25	②TKY15T	③TKY08F	SRG25C SRM25C-M	SRG25E SRM25E-M	APMT1135 PDER-02		
	2250SALL	★	○	4	12.5	25	32	300	170	37	37	1°30'	—	TS43	TS25	②TKY15T	③TKY08F	SRG25C SRM25C-M	SRG25E SRM25E-M	APMT1135 PDER-02		
	2300SNLL	★	—	4	15	30	32	350	100	50	44	1°30'	—	TS55	TS43	③TKY25T	③TKY15F	SRG30C SRM30C-M	SRG30E SRM30E-M	APMT1604 PDER-02		
	2300SALL	★	○	4	15	30	32	350	100	50	44	1°30'	—	TS55	TS43	③TKY25T	③TKY15F	SRG30C SRM30C-M	SRG30E SRM30E-M	APMT1604 PDER-02		


★ Clamp Torque (N · m) : TS25=1.0, TS32=1.0, TS43=3.5, TS55=7.5



● Standard Type

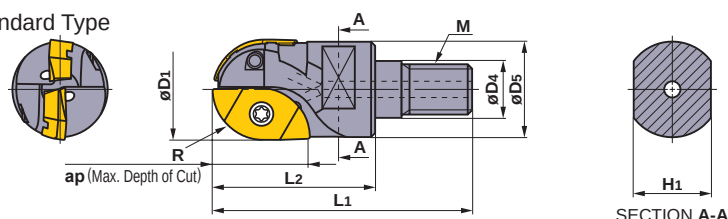

● Long Cutting Edge Type

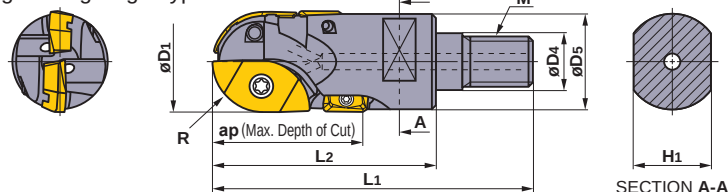

SCREW-IN TYPE

Right hand tool holder only.

Type	Order Number	Stock	Coolant Hole	Number of Teeth	Dimensions (mm)															
					R	D1	D4	D5	L1	L2	H1	M	ap	Inner, Outer	Peripheral	Inner, Outer	Peripheral	Inner	Outer	Peripheral
														Clamp	Screw	Wrench		Insert		
Standard	SRM2160AM08S30	●	○	2	8	16	8.5	14.6	48	30	10	M8	12	TS25H	—	①TKY08D	—	SRG16C SRM16C-M	SRG16E SRM16E-M	—
	2200AM10S35	●	○	2	10	20	10.5	18.6	54	35	14	M10	14	TS32	—	①TKY08D	—	SRG20C SRM20C-M	SRG20E SRM20E-M	—
	2250AM12S40	●	○	2	12.5	25	12.5	23.5	62	40	19	M12	19	TS43	—	②TKY15T	—	SRG25C SRM25C-M	SRG25E SRM25E-M	—
	2300AM16S45	●	○	2	15	30	17	28.3	68	45	24	M16	24	TS55	—	②TKY25T	—	SRG30C SRM30C-M	SRG30E SRM30E-M	—
	2320AM16S45	●	○	2	16	32	17	30.0	68	45	24	M16	28	TS55	—	②TKY25T	—	SRG32C SRM32C-M	SRG32E SRM32E-M	—
Long Cutting Edge	SRM2200AM10L45	★	○	4	10	20	10.5	18.6	64	45	14	M10	30	TS32	TS25	①TKY08D	①TKY08D	SRG20C SRM20C-M	SRG20E SRM20E-M	APMT1135 PDER-02
	2200M10L	●	—	4	10	20	10.5	18.6	66	47	15	M10	30	TS32	TS25	①TKY08D	①TKY08D	SRG20C SRM20C-M	SRG20E SRM20E-M	APMT1135 PDER-02
	2250AM12L55	★	○	4	12.5	25	12.5	23.5	77	55	19	M12	37	TS43	TS25	②TKY15T	③TKY08F	SRG25C SRM25C-M	SRG25E SRM25E-M	APMT1135 PDER-02
	2250M12L	●	—	4	12.5	25	12.5	23.5	77	55	17	M12	37	TS43	TS25	②TKY15T	③TKY08F	SRG25C SRM25C-M	SRG25E SRM25E-M	APMT1135 PDER-02
	2300AM16L60	★	○	4	15	30	17	28.3	83	60	24	M16	44	TS55	TS43	②TKY25T	③TKY15F	SRG30C SRM30C-M	SRG30E SRM30E-M	APMT1604 PDER-02
	2300M16L	●	—	4	15	30	17	28.3	86	63	22	M16	44	TS55	TS43	②TKY25T	③TKY15F	SRG30C SRM30C-M	SRG30E SRM30E-M	APMT1604 PDER-02
	2320AM16L60	★	○	4	16	32	17	29.0	83	60	24	M16	44	TS55	TS43	②TKY25T	③TKY15F	SRG32C SRM32C-M	SRG32E SRM32E-M	APMT1604 PDER-02
	2320M16L	●	—	4	16	32	17	29.0	86	63	22	M16	44	TS55	TS43	②TKY25T	③TKY15F	SRG32C SRM32C-M	SRG32E SRM32E-M	APMT1604 PDER-02

(Note) For screw-in type arbors, refer to page K118—K119.

★ Clamp Torque (N · m) : TS25H=1.0, TS25=1.0, TS32=1.0, TS43=3.5, TS55=7.5

INSERTS > K105

SCREW-IN ARBORS > K118

SPARE PARTS > M001

TECHNICAL DATA > N001