


Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock DP7020	Order Number	Dimensions (mm)						Type
				L1	L2	L3	L6	L9	D4	
19.4	3	□	MMS1940S-DIN	131	81	79	—	50	20	2
	3	□	1940S-DIN-C	131	81	79	—	50	20	1
	5	□	1940L-DIN	153	103	101	—	50	20	2
	5	□	1940L-DIN-C	153	103	101	—	50	20	1
	3	□	1940X3DB	164	103	101	—	61	20	1
	5	□	1940X5DB	204	143	140	—	61	20	1
19.5	3	●	1950S-DIN	131	81	79	—	50	20	2
	3	□	1950S-DIN-C	131	81	79	—	50	20	1
	5	●	1950L-DIN	153	103	101	—	50	20	2
	5	□	1950L-DIN-C	153	103	101	—	50	20	1
	3	★	1950X3DB	164	103	101	—	61	20	1
	5	★	1950X5DB	204	143	140	—	61	20	1
19.6	3	□	1960S-DIN	131	81	79	—	50	20	2
	3	□	1960S-DIN-C	131	81	79	—	50	20	1
	5	□	1960L-DIN	153	103	101	—	50	20	2
	5	□	1960L-DIN-C	153	103	101	—	50	20	1
	3	□	1960X3DB	165	104	104	—	61	20	1
	5	□	1960X5DB	205	144	144	—	61	20	1
19.7	3	□	1970S-DIN	131	81	79	—	50	20	2
	3	□	1970S-DIN-C	131	81	79	—	50	20	1
	5	□	1970L-DIN	153	103	101	—	50	20	2

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock DP7020	Order Number	Dimensions (mm)						Type
				L1	L2	L3	L6	L9	D4	
19.7	5	□	MMS1970L-DIN-C	153	103	101	—	50	20	1
	3	□	1970X3DB	165	104	104	—	61	20	1
	5	□	1970X5DB	205	144	144	—	61	20	1
19.8	3	□	1980S-DIN	131	81	79	—	50	20	2
	3	□	1980S-DIN-C	131	81	79	—	50	20	1
	5	□	1980L-DIN	153	103	101	—	50	20	2
	5	□	1980L-DIN-C	153	103	101	—	50	20	1
	3	□	1980X3DB	165	104	104	—	61	20	1
	5	□	1980X5DB	205	144	144	—	61	20	1
19.9	3	□	1990S-DIN	131	81	79	—	50	20	2
	3	□	1990S-DIN-C	131	81	79	—	50	20	1
	5	□	1990L-DIN	153	103	101	—	50	20	2
	5	□	1990L-DIN-C	153	103	101	—	50	20	1
	3	□	1990X3DB	165	104	104	—	61	20	1
	5	□	1990X5DB	205	144	144	—	61	20	1
20.0	3	●	2000S-DIN	131	81	79	—	50	20	2
	3	□	2000S-DIN-C	131	81	79	—	50	20	1
	5	●	2000L-DIN	153	103	101	—	50	20	2
	5	□	2000L-DIN-C	153	103	101	—	50	20	1
	3	★	2000X3DB	165	104	104	—	61	20	1
	5	★	2000X5DB	205	144	144	—	61	20	1


OPERATIONAL GUIDANCE

Drill Holding




Thrust bearing type collet chuck holds the drill securely.

Drill Length

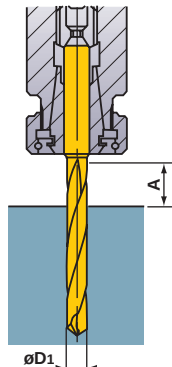


$$A \geq D1 \times 1.5$$

Drill Installation




Do not clamp on the flutes.

Installation Tolerance

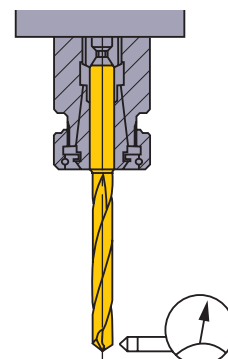

Run-out ≤ 0.03mm

Through Coolant Type




Coolant pressure is approx. 0.5MPa—7MPa

Coolant Handling

- 1) Dirt and dust particles in old coolant can clog the oil hole and prevent effective flow. Regular coolant exchange is recommended.
- 2) Small particles of swarf will jam in the oil hole. Use a filter as a preventative measure. When using small diameter drills, use a fine mesh filter.


Thin Workpiece



If Bending Occurs

Support the Workpiece

Interrupted Cutting

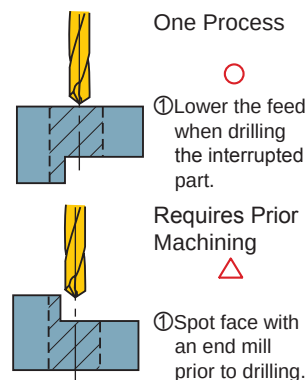

One Process

① Lower the feed when drilling the interrupted part.

Requires Prior Machining

① Spot face with an end mill prior to drilling.