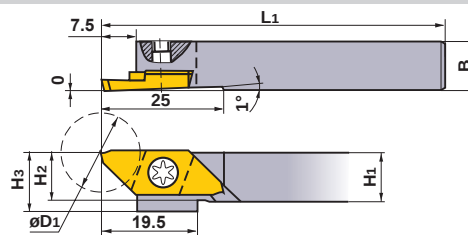



EXTERNAL CUTTING OFF

СТВН














Right hand tool holder shown.

Order Number	Stock		Insert Number		Dimensions (mm)					Max. Cut Off Diameter (mm) D ₁	 ★	
	R	L			H ₁	B	H ₂	L ₁	H ₃		Clamp Screw	Wrench
CTBHR/L1010-160	★	★	CTBT		10	10	10	120	12	16	NS402W	NKY15R
1212-160	★	★			12	12	12	120	—	16	NS403W	NKY15R
1616-160	★	★			16	16	16	120	—	16	NS403W	NKY15R

* Clamp Torque (N・m) : NS402W=1.0, NS403W=1.0

INSERTS

Holder	Setting Geometry	Breaker	Geometry	Insert Geometry	Order Number	Hand	Coated	Dimensions (mm)		Max. Cut Off Diameter (mm)
							VP15TF	W ₃	Re	
Right Hand (R)		With Breaker			CTBT15160V5RR-B	R	★	1.5	0.05	16
				20160V5RR-B	R	★	2.0	0.05	16	
				CTBT20160V5RN-B	N	★	2.0	0.05	16	
Left Hand (L)					CTBT20160V5LL-B	L	★	2.0	0.05	16
					CTBT20160V5LN-B	N	★	2.0	0.05	16
			CTBT20145V5LR-B	R	★	2.0	0.05	14.5		

Right hand insert shown.

★ : Inventory maintained in Japan.