



## SQUARE TYPE HOLDER

CB type (Boring bar fits in a holder)

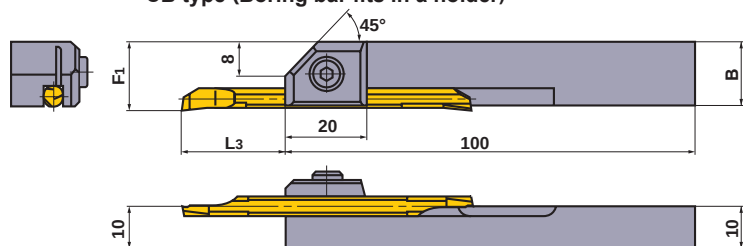

CR type (Boring bar fits in a holder)

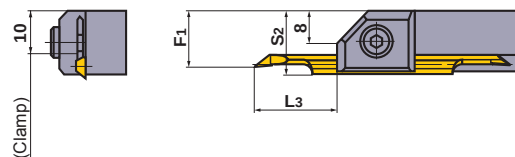

| Order Number | Stock | Dimensions (mm) |       |                 |              |    |      | Micro-Mini Twin        |            | Clamp Screw | Wrench | Torque<br>(N • m) |
|--------------|-------|-----------------|-------|-----------------|--------------|----|------|------------------------|------------|-------------|--------|-------------------|
|              |       | F1              |       | L3 ★            |              | S2 | B    |                        |            |             |        |                   |
|              |       | CB              | CR    | CB              | CR           | CR | CR   | CB                     | CR         |             |        |                   |
| SBH1020R     | ★     | 13              | —     | 6—24 (6—10)     | —            | —  | 12.9 | 02RS(-B)<br>02RS-0○(B) | —          | HSC04010    | HKY30R | 4.8               |
| 1030R        | ★     | 14              | 12.65 | 8.5—22 (9—15)   | 11—19.5 (12) | 14 | 13.8 | 03RS(-B)<br>03RS-0○(B) | 03RS-01(B) | HSC05012    | HKY40R | 9.5               |
| 1040R        | ★     | 15              | 13.15 | 11—29.5 (12—20) | 13—27.5 (14) | 15 | 14.7 | 04RS(-B)<br>04RS-0○(B) | 04RS-01(B) | HSC05012    | HKY40R | 9.5               |
| 1050R        | ★     | 16              | 13.65 | 13.5—37 (15—25) | 15—35.5 (16) | 16 | 15.6 | 05RS(-B)<br>05RS-0○(B) | 05RS-01(B) | HSC05012    | HKY40R | 9.5               |
| 1060R        | ★     | 17              | —     | 13.5—42 (18—30) | —            | 17 | 16.5 | 06RS(-B)<br>06RS-0○(B) | —          | HSC05012    | HKY40R | 9.5               |
| 1070R        | ★     | 18              | —     | 13.5—52 (21—35) | —            | 18 | 17.4 | 07RS(-B)<br>07RS-0○(B) | —          | HSC05012    | HKY40R | 9.5               |

★L3 is the maximum length of overhang recommended for efficient clamping, and ( ) is the recommended length for general purpose steel machining.

(Note) The MICRO-DEX and the MICRO-MINI cannot be fitted to square holders.