



Left hand tool holder shown.

★ Wrench : ① : Clamp Screw, ② : Blade Screw


SPARE PARTS

Modular Holder Number		 (5 pieces)	
	Clamp Screw	Blade Screw	Wrench ★
GYHL2020K00-M25L	GY06013M (Clamp Torque : 6.0N·m)	TS55 (Clamp Torque : 5.0N·m)	①TKY30R ②TKY25D
GYHL2525M00-M25L			

Dimensions (mm) ★1								Fig.	Cutting Mode	Insert	
H1	B	L1	L2	H2	F1	S3				Geometry / Insert Number	Page
20	20	125	39	20	26	5	2			GY2M0239E020N-GU GY2M0250E020N-GU	F014 —016
20	20	125	39	20	26	5	2			GY2M0239E020N-GS GY2M0250E020N-GS	
20	20	125	39	20	26	5	2			GY2M0239E020N-GM GY2M0250E020N-GM	
20	20	125	39	20	26	5	2			GY2G0239E020N-MF GY2G0250E020N-MF GY2G0274E020N-MF	
20	20	125	39	20	26	5	2			GY2M0250E020N-MS (Gauge insert)	
20	20	125	39	20	26	5	2			GY2M0250E020N-MM	
25	25	150	39	25	28	—	1			GY2M0250E125N-BM	
25	25	150	39	25	28	—	1			GY1G0239E020N-GFGS GY1G0250E020N-GFGS	
25	25	150	39	25	28	—	1				
25	25	150	39	25	28	—	1				
25	25	150	39	25	28	—	1				
25	25	150	39	25	28	—	1				

Notes when selecting a modular blade (2)

- When machining wide face grooves, select a modular blade suitable for the maximum diameter and machine from the outer diameter towards the centre.
- When machining toward the centre, there is no restriction on the cutting diameter.
- For details, please refer to page F106.

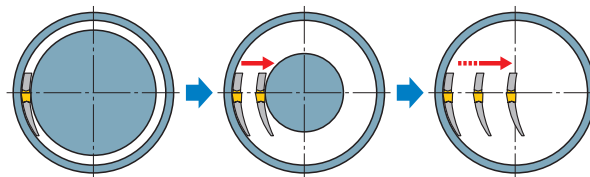

IDENTIFICATION	➤ F012, F013
CUTTING CONDITIONS	➤ F104
SPARE PARTS	➤ M001