


INTERNAL GROOVING

SQUARE TYPE HOLDER

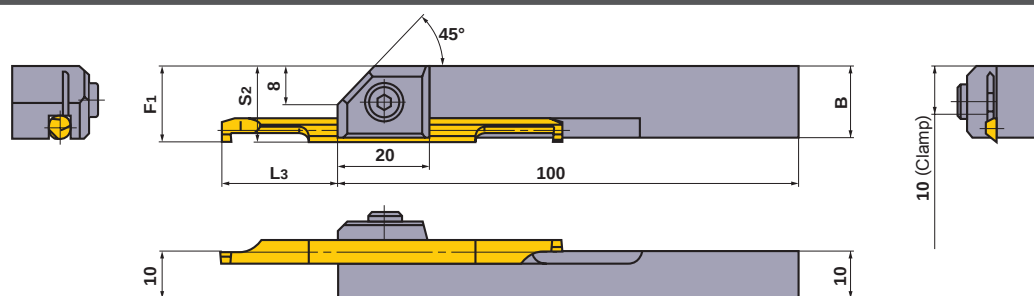

Order Number	Stock	Dimensions (mm)					MICRO-MINI TWIN CG	Clamp Screw	Wrench	Torque (N•m)
		MICRO-MINI TWIN CG								
		B	F1	L3 ★		S2				
				Width of Cutting Edge 1mm	Width of Cutting Edge 2mm					
SBH1030R	★	13.8	13.8	13—17.5 (14)	14—16.5 (15)	14	03RS-10(B), 03RS-20(B)	HSC05012	HKY40R	9.5
1040R	★	14.7	14.8	18—22.5 (19)	19—21.5 (20)	15	04RS-10(B), 04RS-20(B)	HSC05012	HKY40R	9.5
1050R	★	15.6	15.8	23—27.5 (24)	24—26.5 (25)	16	05RS-10(B), 05RS-20(B)	HSC05012	HKY40R	9.5
1060R	★	16.5	16.8	23—32.5 (24)	24—31.5 (25)	17	06RS-10(B), 06RS-20(B)	HSC05012	HKY40R	9.5
1070R	★	17.4	17.8	28—38 (29)	29—37 (30)	18	07RS-10(B), 07RS-20(B)	HSC05012	HKY40R	9.5

★ L3 is the length of overhang for sufficient clamping, and () is the recommended length for steel machining and for general purpose.