


SQUARE TYPE HOLDER

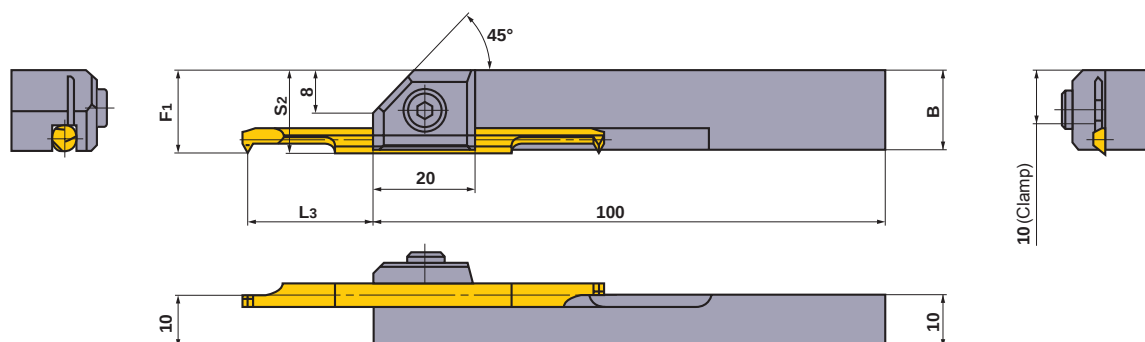

Order Number	Stock	Dimensions (mm)				Micro-Mini Twin CT	Clamp Screw	Wrench	Torque (N•m)
		Micro-Mini Twin CT							
		B	F1	L3 * S2	S2				
SBH1030R	★	13.8	13.8	13—17.5(14)	14	0305RS-M4, 03RS-M4(B)	HSC05012	HKY40R	9.5
1040R	★	14.7	14.8	18.5—22(19.5)	15	0407RS-M6, 04RS-M6(B)	HSC05012	HKY40R	9.5
1050R	★	15.6	15.8	24—26.5(25)	16	0511RS-M8, 05RS-M8(B)	HSC05012	HKY40R	9.5
1060R	★	16.5	16.8	24—31.5(25)	17	0611RS-M10, 06RS-M10(B)	HSC05012	HKY40R	9.5

★ L3 is the length of overhang for sufficient clamping, and () is the recommended length for machining of carbon and alloy steel.