


VFMFPR

Roughing end mill, Medium cut length, 4 flute



CARBIDE

Carbon Steel, Alloy Steel, Cast Iron (≤30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
◎	◎	○		◎	◎		

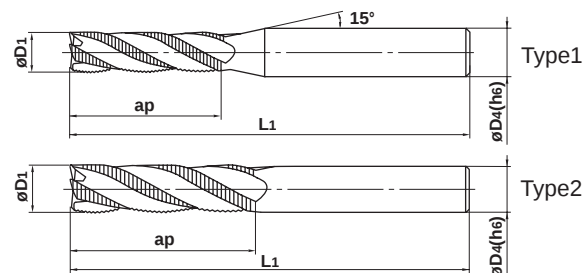

SQUARE

BALL

RADIUS

TAPER

SOLID END MILLS

h6	D4=6	8≤D4≤10	12≤D4≤16	D4=20
	0 - 0.008	0 - 0.009	0 - 0.011	0 - 0.013

- Impact Miracle roughing end mills suitable for the machining of deep walled components.

Unit : mm

Order Number	D1	ap	L1	D4	Flutes	Stock	Type
VFMFPRD0500	5	15	60	6	4	●	1
D0600	6	17	60	6	4	●	2
D0700	7	22	75	8	4	●	1
D0800	8	28	75	8	4	●	2
D0900	9	28	100	10	4	●	1
D1000	10	34	100	10	4	●	2
D1200	12	40	110	12	4	●	2
D1600	16	48	125	16	4	●	2
D2000	20	57	140	20	4	●	2

RECOMMENDED CUTTING CONDITIONS**Shoulder milling**

Work material	Carbon steel, Cast iron, Alloy steel (—30HRC)		Alloy steel, Tool steel, Pre-hardened steel		Austenitic stainless steel, Titanium alloy		Hardened steel (45—55HRC)		Heat resistant alloys	
	Cf53, GG25		X40CrMoV51		X5CrNi1810, X5CrNiMo17-12-2, Ti6Al4V		X40CrMoV51		Inconel718	
Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)
5	3800	360	3200	290	2500	150	2500	150	1900	50
6	3200	360	2700	290	2100	160	2100	160	1600	60
8	2400	450	2000	360	1600	160	1600	160	1200	70
10	1900	450	1600	360	1300	180	1300	180	1000	75
12	1600	400	1300	320	1100	180	1100	180	800	80
16	1200	360	1000	290	800	160	800	160	600	80
20	1000	340	800	270	600	150	600	150	500	80
Depth of cut										

D: Dia.

- When cutting austenitic stainless steels, the use of water-soluble cutting fluid is effective.
- If the depth of cut is shallow, the revolution and feed rate can be increased.
- If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolution and feed rate proportionately.