


AM25CRB

Corner radius end mill, Short cut length, 2 flute, Relieved neck




CARBIDE

Carbon Steel, Alloy Steel, Cast Iron (≤30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						○	◎



Type1

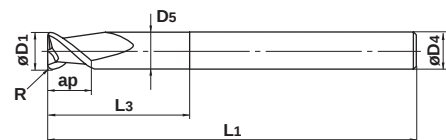

Type2



D1 ≤ 12	D1 > 12			
0 - 0.020	0 - 0.030			

- High efficiency machining of aluminium alloy.

Unit : mm

Order Number	D1	R	ap	L3	D5	L1	D4	Flutes	Stock	Type
AM2SCRBD0300A060R030	3	0.3	6	12	2.7	60	6	2	●	1
D0300A060R050	3	0.5	6	12	2.7	60	6	2	●	1
D0400A060R030	4	0.3	6	12	3.7	60	6	2	●	1
D0400A060R050	4	0.5	6	12	3.7	60	6	2	●	1
D0500A060R030	5	0.3	8	15	4.7	60	6	2	●	1
D0500A060R050	5	0.5	8	15	4.7	60	6	2	●	1
D0600A075R030	6	0.3	8	16	5.7	75	6	2	●	2
D0600A075R050	6	0.5	8	16	5.7	75	6	2	●	2
D0600A075R100	6	1	8	16	5.7	75	6	2	●	2
D0800A075R030	8	0.3	10	20	7.4	75	8	2	●	2
D0800A075R050	8	0.5	10	20	7.4	75	8	2	●	2
D0800A075R100	8	1	10	20	7.4	75	8	2	●	2
D0800A075R160	8	1.6	10	20	7.4	75	8	2	●	2
D0800A075R250	8	2.5	10	20	7.4	75	8	2	●	2
D1000A075R030	10	0.3	12	30	9.4	75	10	2	●	2
D1000A075R050	10	0.5	12	30	9.4	75	10	2	●	2
D1000A075R100	10	1	12	30	9.4	75	10	2	●	2
D1000A075R160	10	1.6	12	30	9.4	75	10	2	●	2
D1000A075R250	10	2.5	12	30	9.4	75	10	2	●	2
D1000A100R030	10	0.3	12	35	9.4	100	10	2	●	2
D1000A100R050	10	0.5	12	35	9.4	100	10	2	●	2
D1000A100R100	10	1	12	35	9.4	100	10	2	●	2
D1000A100R160	10	1.6	12	35	9.4	100	10	2	●	2
D1000A100R250	10	2.5	12	35	9.4	100	10	2	●	2
D1200A075R030	12	0.3	15	30	11.4	75	12	2	●	2
D1200A075R050	12	0.5	15	30	11.4	75	12	2	●	2
D1200A075R100	12	1	15	30	11.4	75	12	2	●	2
D1200A075R160	12	1.6	15	30	11.4	75	12	2	●	2
D1200A075R250	12	2.5	15	30	11.4	75	12	2	●	2
D1200A075R320	12	3.2	15	30	11.4	75	12	2	●	2
D1200A075R400	12	4	15	30	11.4	75	12	2	●	2
D1200A100R030	12	0.3	15	35	11.4	100	12	2	●	2
D1200A100R050	12	0.5	15	35	11.4	100	12	2	●	2
D1200A100R100	12	1	15	35	11.4	100	12	2	●	2

SQUARE

BALL

RADIUS

TAPER

SOLID END MILLS