



MSTAR END MILLS

MS2MTB

Ball nose taper, Medium cut length, 2 flute



Carbon Steel, Alloy Steel, Cast Iron (≤30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
◎	◎	○		○	○		

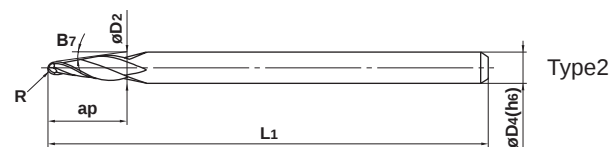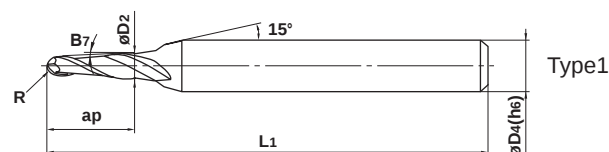

R	0.2 ≤ R ≤ 1.5				
	±0.01				
h6	4 ≤ D4 ≤ 6				
	0 - 0.008				

● 2 flute taper ball nose end mill.

Unit : mm

Order Number	R	B7	ap	D2	L1	D4	Flutes	Stock	Type
MS2MTBR0020T0300	0.2	3°	3	0.69	40	4	2	★	1
R0020T0500	0.2	5°	3	0.89	40	4	2	★	1
R0020T0700	0.2	7°	3	1.09	40	4	2	★	1
R0020T1000	0.2	10°	3	1.39	40	4	2	★	1
R0030T0300	0.3	3°	3	0.88	40	4	2	★	1
R0030T0500	0.3	5°	3	1.07	40	4	2	★	1
R0030T0700	0.3	7°	3	1.27	40	4	2	★	1
R0030T1000	0.3	10°	3	1.56	40	4	2	★	1
R0050T0030	0.5	30'	3	1.04	40	4	2	★	1
R0050T0100	0.5	1°	3	1.09	40	4	2	★	1
R0050T0130	0.5	1° 30'	3	1.13	40	4	2	★	1
R0050T0200	0.5	2°	3	1.18	40	4	2	★	1
R0050T0300	0.5	3°	3	1.26	40	4	2	★	1
R0050T0500	0.5	5°	3	1.44	40	4	2	★	1
R0050T0700	0.5	7°	6	2.36	45	4	2	★	1
R0075T0030	0.75	30'	6	1.59	40	4	2	★	1
R0075T0100	0.75	1°	6	1.68	40	4	2	★	1
R0075T0130	0.75	1° 30'	6	1.78	40	4	2	★	1
R0075T0200	0.75	2°	6	1.87	40	4	2	★	1
R0075T0300	0.75	3°	6	2.05	40	4	2	★	1
R0075T0700	0.75	7°	6	2.8	40	4	2	★	1
R0100T0030	1	30'	8	2.12	45	4	2	★	1
R0100T0100	1	1°	8	2.24	45	4	2	★	1
R0100T0130	1	1° 30'	8	2.37	45	4	2	★	1
R0100T0200	1	2°	8	2.49	45	4	2	★	1
R0100T0300	1	3°	8	2.74	45	4	2	★	1
R0100T0400	1	4°	8	2.98	45	4	2	★	1
R0100T0500	1	5°	8	3.23	45	4	2	★	1
R0100T0700	1	7°	8	3.73	50	6	2	★	1
R0125T0030	1.25	30'	10	2.65	45	4	2	★	1
R0125T0100	1.25	1°	10	2.81	45	4	2	★	1
R0125T0130	1.25	1° 30'	10	2.96	45	4	2	★	1
R0125T0200	1.25	2°	10	3.11	45	4	2	★	1
R0125T0300	1.25	3°	10	3.42	45	4	2	★	1

★ : Inventory maintained in Japan.