

VA2MS


End mill, Medium cut length, 2 flute



D1 < 3

D1 ≥ 3

Carbon Steel, Alloy Steel, Cast Iron (≤30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
◎	○			○	○		

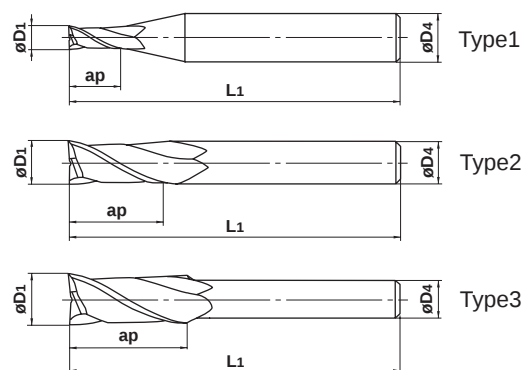

D1 ≤ 20	D1 > 20			
0 - 0.030	0 - 0.040			

- 2 flute end mill with high grade HSS substrate and Violet coating for general use.

Unit : mm

Order Number	D1	ap	L1	D4	Flutes	Stock	Type
VA2MSD0300	3	10	50	6	2	●	1
D0400	4	12	60	8	2	●	1
D0500	5	15	60	8	2	●	1
D0600	6	15	60	8	2	●	1
D0700	7	20	65	10	2	●	1
D0800	8	20	65	10	2	●	1
D0900	9	25	75	10	2	●	1
D1000	10	25	75	10	2	●	2
D1100	11	30	85	12	2	●	1
D1200	12	30	85	12	2	●	2
D1300	13	35	90	12	2	●	3
D1400	14	35	95	16	2	●	1
D1500	15	40	100	16	2	●	1
D1600	16	40	100	16	2	●	2
D1700	17	40	100	16	2	★	3
D1800	18	40	100	16	2	★	3
D1900	19	45	120	20	2	★	1
D2000	20	45	120	20	2	●	2
D2200	22	45	120	20	2	★	3
D2400	24	50	140	25	2	★	1
D2500	25	50	140	25	2	★	2
D2600	26	50	140	25	2	★	3
D2800	28	55	145	25	2	★	3
D3000	30	55	145	25	2	★	3
D3200	32	60	160	32	2	★	2
D3500	35	60	160	32	2	★	3
D4000	40	65	165	32	2	★	3

SQUARE

BALL

RADIUS

TAPER

SOLID END MILLS